


Installation Notes

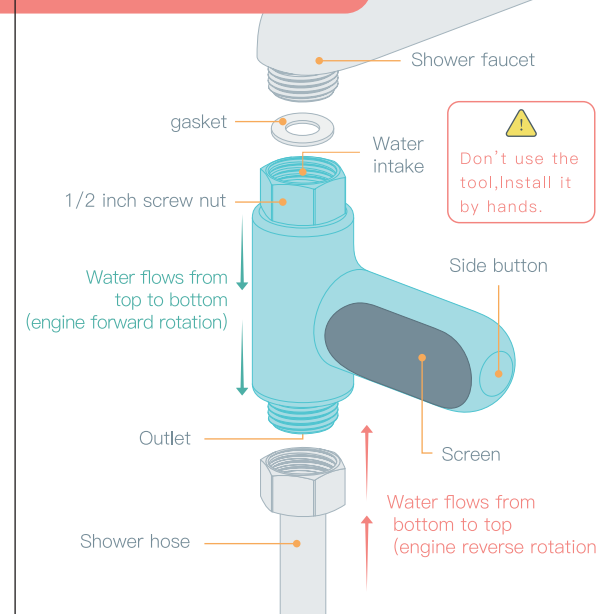

Temperature measurement mode

Temperature Display Unit

The change of the water temperature in the water pipe in real time;The temperature unit can choose °C or °F,The temperature unit can be switched by side key for three seconds;The temperature can be accurate to 0.5 °C or 1°F.



Water Temperature Indicator Light

When the water temperature at suitable temperature, indicator light is green;When the water temperature is below this temperature range,indicator light is blue;When the water temperature is above this temperature range,indicator light is red.


<37°C or <100°F	37–42.5°C or 80–108°F	>42.5°C or >108°F

Generator

Generator Water Pressure


This product supports both forward and reverse operation modes:
Forward rotation (conventional water flow direction: top to bottom): can be started when water pressure $\geq 0.1\text{MPa}$.
Reverse rotation (water flow direction: bottom to top): can operate normally only when water pressure $\geq 0.25\text{MPa}$.

Timing mode

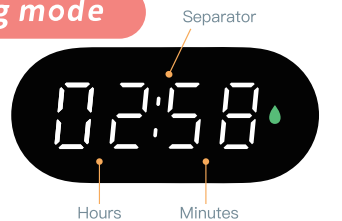

Switch the timing and temperature interface by pressing [side button],the timing function can record the time spent in bathing;Built-in memory chip can record the cumulative time of multiple baths,Long press the side key on the side of the timing interface can reset the time;The maximum time can be 99:59,when the time reaches the maximum value,it automatically starts from zero.

Package content



Product ×1



Gasket ×1



Operating Manual ×1

Parameter

Product name:	Shower Thermometer V2
Product model:	BD-LS-05
Weight:	85g
Specifications:	97.2×82.2×30.3mm
Material:	ABS(plating)、PC
Screw nut size:	1/2inch
Temperature range:	0°C–100°C(32°F–212°F)
Measurement error:	±0.5°C(±1°F)
Measurement accuracy:	0.5°C(1°F)
Timing range:	≤99 hours 59 minutes

The warranty

This product has 12 months warranty.Customers can get free service at the point of sale within 12 months.We provide paid service after the warranty.


The following situation cannot enjoy our warranty:
1.Product is not produced by our company.
2.Product damaged by force majeure such as earthquake, fire, etc.
3.Damaged due to human reasons (unauthorized removal, modification of any component,install, storage and use did not follow the instructions).

Xiamen Bandian Originality technology co., LTD
3 floor, NO.1709–1, Dianqian community, Huli district, Xiamen, Fujian province, China
Zip code: 361006
Web: www.bandian.cc
Tel: 0592–5082991


★We reserve all the rights for the final explanation.

LED 无源水温计 Shower Thermometer

使用说明书
Operating manual

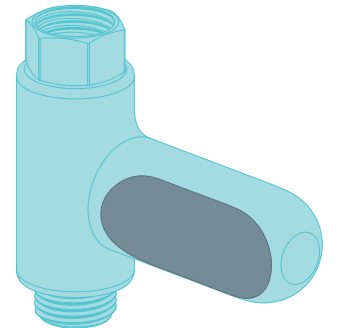

安装说明

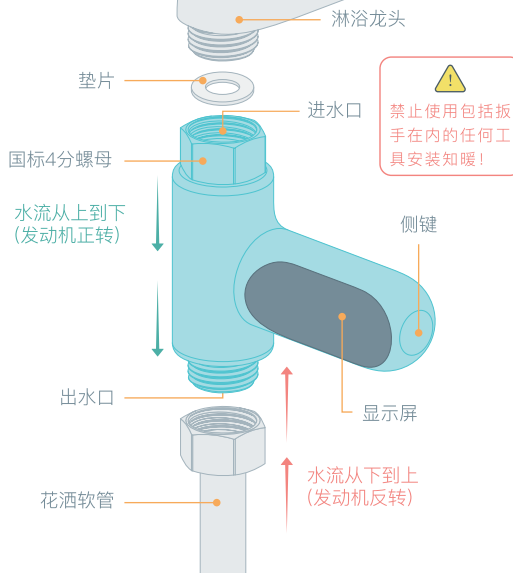

测温模式

温度显示区

实时显示水管中水温的变化；温度单位可以选择℃或°F，通过长按【侧键】3秒来切换温度单位；温度可以精确到0.5℃或1°F。



水温指示灯

当水温处于适宜温度时，指示灯为绿色；当水温低于这个温度区间，指示灯为蓝色；当水温高于这个温度区间，指示灯为红色。



发电机

发电机水压


本产品支持正反转工作模式：正转为常规水流方向(水流从上到下)，水压≥0.1MPa即可启动；反转水流（水流从下到上）方向需水压≥0.25MPa方可正常工作。

计时模式



通过短按【侧键】来切换计时和温度界面，计时功能可以记录洗澡所消耗的时间；内置记忆芯片，可以记录多次洗澡的累计时间，通过在计时界面长按【侧键】清零计时时间；最大可以计时99时59分，当时间达到最大值时，会自动从0开始计时。

包装内容



产品 ×1



垫片 ×1



说明书 ×1

产品参数

产品名称：	无源 LED 温度计 V2
产品型号：	BD-LS-05
产品重量：	85g
产品规格：	97.2×82.2×30.3mm
产品材质：	ABS (电镀)、PC
螺母规格：	国标 4 分 (1/2 英寸)
温度量程：	0℃-100℃ (32°F-212°F)
测量误差：	±0.5℃ (±1°F)
测量精度：	0.5℃ (1°F)
计时量程：	≤99 时 59 分

保修条款

本产品有效保修期限为自售出之日起一年，在保修期限内可以凭购买记录到购买点得到免费维修服务，保修期外的产品可以凭购买记录到购买点得到有偿维修服务。

本产品的保修不适用于：

- 1、非本公司生产的产品；
- 2、因自然灾害等不可抗力（如地震、火灾等）原因造成的产品故障或损坏；
- 3、因人为原因（擅自拆卸、更改任何元件、未按照说明书要求错误安装、保管及使用）造成产品故障或损坏。

厦门半点创意科技有限公司出品
厦门市湖里区殿前社1709-1号三楼
邮编：361006
网址：www.bandian.cc
电话：0592-5082991

★本保修条款最终解释权归半点创意科技有限公司所有。



保修卡 | Warranty card

姓名/ID | Name/ID:

购买日期 | Date of purchase:

联系电话 | Telephone:

用户地址 | Customer address:

退换货原因 | Reason for returning or exchanging goods:

合格 检验员：QC001

Conformity checker: QC001

Copyright © All reserved by Bandian Originality