ACEFAST


A158



Quick Start Guide

PD65W GaN (2USB-C+1USB-A) charger
with TFT color display

Product Diagram

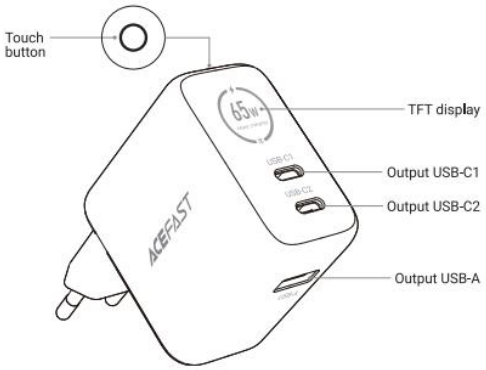



Emoticons



Maximum power interface



Power distribution interface



Temperature interface

Thank you for purchasing the PD65W GaN (2USB-C+1USB-A) charger with TFT color display.
Please read this user manual carefully and keep it for future reference. If you need any assistance, please contact our support team with your product model number and Amazon order number.

Specifications

Input	AC100-240V, 50 / 60Hz, 1.5A
Output USB-C1/C2	5V-20V⎓3.0A (PPS), 5V / 9V / 12V / 15V⎓3A, 20V⎓3.25A - 65W (max)
Output USB-A	5V / 9V⎓3A, 12V⎓2.5A, 20V⎓1.5A - 30W (max)
Output USB-C1 + USB-C2	45W + 20W - 65W (max)
Output USB-C1 + USB-A	45W + 18W - 63W (max)
Output USB-C2 + USB-A	5V⎓3A - 15W (max)
Output USB-C1 + (USB-C2 + USB-A)	45W + (15W) - 60W (max)
Support fast charge protocols	
USB-C1 / C2	PPS / PD3.0 / PD2.0 / QC4+ / QC3.0 / QC2.0 / SCP / AFC / FCP / DCP1.5A / iP2.4A / SAM 5V⎓2A
USB-A	QC3.0 / QC2.0 / SCP / AFC / FCP / DCP1.5A / iP2.4A / SAM 5V⎓2A

Getting started
1. Plug the charger into a wall socket.
2. Connect the charging cable to the device's charging port and plug the other end into the charger's output port.
3. A Type-C cable with E-Marker function is required to achieve maximum power output.
4. Tap the touch button to switch between display screens, where you can view the power and temperature. Press and hold a touch button for 3 seconds to change the viewing angle.
5. Once charging is complete, unplug the device.

Use environment
1. Working environment temperature: use at altitudes below 2000 meters and under non-tropical climate conditions.
2. The device is only suitable for indoor use.
3. Storage temperature: –20℃~40℃.

Note:
Please read all instructions and warnings before using this product. Improper use will cause damage to the product.
1. Do not store this product under high temperature, strong light and strong magnetic environment, do not place it in other harsh environments such as near fire source to avoid heat, combustion or electrical shock.
2. When over-voltage, over-current, or over-temperature occurs during charging, the charger will automatically stop charging to avoid damage. When returning to the normal state, charging will continue.
3. Do not disassemble, repair or modify this device by yourself.
4. Do not touch the power adapter with wet hands or immerse it in water or other liquids.
5. Do not use the power adapter for products higher than the output range of this product to avoid electrical shock, burning or damage to the device.