


270.00 mm




## LED DAZZLING ALARM CLOCK

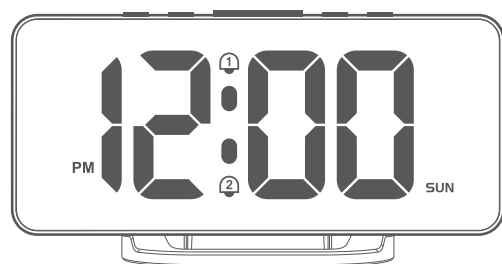

### Product Instructions

2023.0501.V1.0

Please read this manual carefully for the first time to get the best experience of using this product

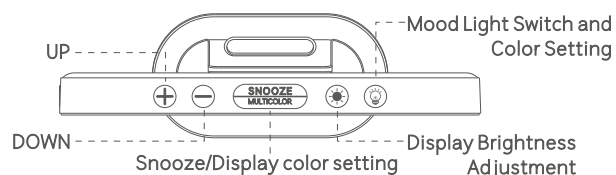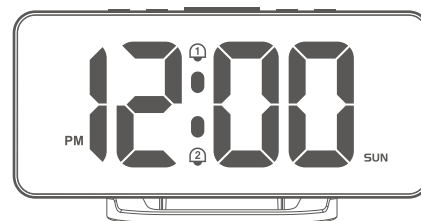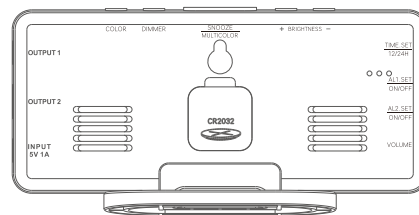

Packing List: 1 Main Unit; 1 Power Cord; 1 2032 Button Cell Battery; 1 Instruction Manual

### Function Overview

HD LED Display  
12/ 24-Hour Format Switch  
Time and Day of the Week on the Same Screen  
Alarm Clock, Snooze Function  
Memory Function (2032 Coin Cell Battery Installed)  
Atmosphere Light Function  
Type-C Port  
Alarm Volume Setting

### Product Installation

1. Install the 2032 button battery in the battery compartment according to the "+, -" pole direction, and cover the lid.
2. Plug the Type-C end of the power cord into the "INPUT 5V 1A" port, printed on the product, and plug the USB end into the USB 5V power supply port.
3. Tear off the protective film on the surface of the screen.

### Clock Setting Section





#### Time Setting

1. In time display mode, long press "TIME SET" button for 3 seconds to enter the time setting; At this moment, HOUR digits flashes, press "+" or "-" button to adjust the hour; Press "TIME SET" button again to enter the minute setting, When MINUTE digits flash, press "+" or "-" to adjust the minute.

2. Press "TIME SET" button again, Week digits flashes, press "+" or "-" to adjust to the correct Wednesday.
3. Press "TIME SET" button again to enter snooze time setting, Snooze Time digits flash, press "+" or "-" to adjust snooze time (5-60 minutes).
4. Press "TIME SET" button to exit the setting and return to the time display.

**NOTE:** Before setting the time, pay attention to whether AM (morning) / PM (afternoon) setting is correct.  
Short press "TIME SET" to switch 12/24 hours format, the corresponding AM/PM will be light on/off.

### Alarm Setting:



1. In the time display mode, long press "AL1.SET" button (icon ) for 3 seconds to enter alarm setting; at this time, the alarm 1 (icon ) and Hour digits flash, press "+" or "-" to adjust the hour. Press "AL1.SET" button (icon ) again to enter minute setting, when Minute digits flash, press "+" or "-" to adjust the minute.
2. Press "AL1.SET" button (icon ) to enter alarm mode setting, and press "+" or "-" to select alarm mode.
 

1-5 Weekend break mode	Ringing from Monday to Friday
1-6 Single break mode	Ringing from Monday to Saturday
1-7 Daily mode	Ringing every day
6-7 Weekend ringing mode	
1-1 Same day ringing mode	

3. Press "AL1.SET" button (icon ) again to exit the setting and return to the time display.

**NOTE:** Alarm 1 and Alarm 2 settings are the same.

### Usage of Alarm and Snooze | SNOOZE MULTICOLOR

1. In the time display mode, short press " or 
 button to turn on or off alarm (alarm icon lights up when the alarm is on). When alarm function has been turned on and the set alarm time is reached, it will ring for 2 minutes.
2. When alarm goes off, press "SNOOZE MULTICOLOR" button to suspend the alarm, and it will enter the state of snooze. The alarm icon flashes until the set snooze time is up, clock will alarm again.
3. When alarm goes off, press any button except "SNOOZE MULTICOLOR" to stop the alarm.


### Clock Display Color Setting SNOOZE MULTICOLOR

In clock display mode, short press "SNOOZE MULTICOLOR" button to set the favorite clock display color, a total of 11 light color display mode.

### Clock Display Brightness Setting DIMMER

In time display mode, short press "Brightness" Setting button to adjust the display brightness (3 levels of brightness adjustment, the last level for the screen off function).



### Clock Night Brightness Setting DIMMER

In time display mode, press " " button for 3 seconds to enter the night mode setting, Now press "+" or "-" to turn on or off the night mode.

Then press " " button again to exit the setting and return to the time display.

When night mode is on and the display brightness is high, the display will automatically darken at night (18:00-6:00).

### Alarm Volume Setting VOLUME

In time display interface, short press " " button to switch the alarm clock ringing loud (db95)/low (db55), after setting done, short press " " button to return to time interface, or automatically return to time interface after 10 seconds of ringing.

### Mood Light Setting Section

In time display interface, short press " " button to turn on mood light, long press " " button for 3 seconds to turn off mood light. When mood light is on, short press " " button to change the color mode of mood light, short press "+" or "-" to change the light brightness.

### USB Power Supply

In normal use process of the product, USB port allows you to charge (slow charging) or power external devices such as cell phones.

**NOTE:** Please use 5V 1A or 2A adapter, do not use any adapter higher than parameter above.

Thank you for purchasing this product  
For your better experience  
Please read and keep this manual carefully.

### Environmental Protection

Electronic products disposal instructions  
If the product is damaged and needs to be recycled. Please send the product to the nearest recycling division.

100.00 mm