


21X29


Single Handle Pull Down Kitchen Faucet Installation Instructions

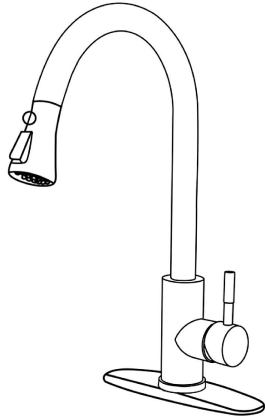

NOTE:

1. Sprayer head button activates once water passes through.
2. Sprayer head can be retracted well once the weight function is attached.
3. Before installing new faucet, flush any contaminants in your supply lines for 30-60 seconds until water is clean.

DIY Tools:




adjustable Wrench



Gloves



Prepare wrenches and gloves before installation. The wrench is used to tighten the nut and gloves are used to protect hands.




1. Flush any contaminants in your supply lines for 30-60 seconds until water is clean.





2. Pull cold/hot hoses through the thread tube and screw the tube to the right until tight.

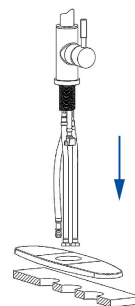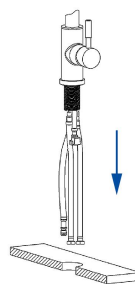



3. Insert the faucet into counter top. If a three hole counter, use the center hole with deck plate. (Please do not take apart the white foam which is used to seal the water).

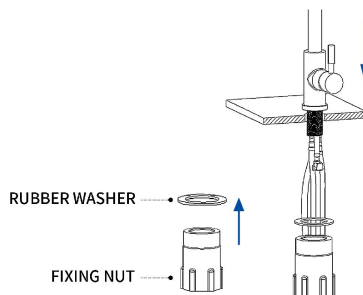

4. Pass the rubber gasket and the fixing nut through the faucet in turn, and then turn the nut to the right until tight.

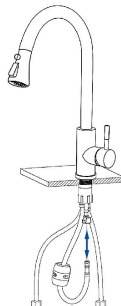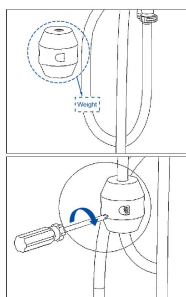


5. First separate the gravity ball with a screwdriver. Then install the gravity ball on the pull out hose and fix it with screws. (Placed as shown: Otherwise, the sprayer head cannot be retracted)
6. Insert the pull hose into the connector until you hear "click". Fix the gravity ball on the hose (Place as shown: the best position to install the gravity ball)

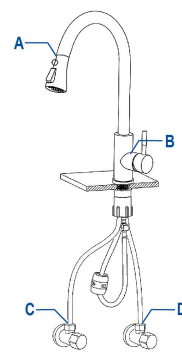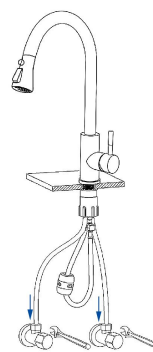

7. Connect hot and cold water lines to the water supply by wrench. DO NOT OVER TIGHTEN. Or the washer will be damaged.

8. Check for leaks at the (A,B,C,D) connections. Retighten if necessary.

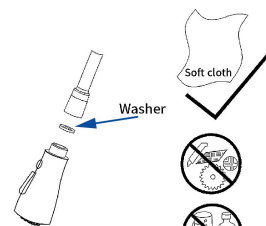

Maintenance:

We suggest that you clean the surface of your faucet and the washer as shown often. Do not use strong detergents or harsh cleansers. Using of sharp objects may harm your faucet.